

HAND RAILINGS

MILD STEEL STANCHIONS

- ◆ Ball type tubular welded construction.
- ◆ Forged (Solid).

FINISHES AVAILABLE

- ◆ Uncoated, zinc chromate primed or galvanized to SABS 1461 requirements.
- ◆ Other paint specifications on application.

SPECIFICATIONS

	TUBULAR	FORGED
STANCHION	42,9mm O.D	32mm Ø
BENDS	34,1mm O.D	25mm Ø
HANDRAIL TUBING	34,1mm O.D	25mm Ø
	2,5mm thick	6000mm long
	6000mm long	

STAINLESS STEEL STANCHIONS

- ◆ Grade 304 and 3CR12
- ◆ Unique, aesthetic design


SPECIFICATIONS

STANCHION TUBE	45,0mm O.D
BENDS	31,8mm O.D
HANDRAIL TUBING	31,8mm O.D
	1,5mm thick
	6100mm long

SELECTION GUIDE

RECOMMENDED STANCHION CENTRES ARE:

- ◆ ON STAIRS: 1000 mm
- ◆ PLATFORM AREAS: 1500mm
- ◆ MAINTENANCE WALKWAYS: up to 1800mm
- ◆ PUBLIC OR SPECTATOR AREAS - not more than 1000mm

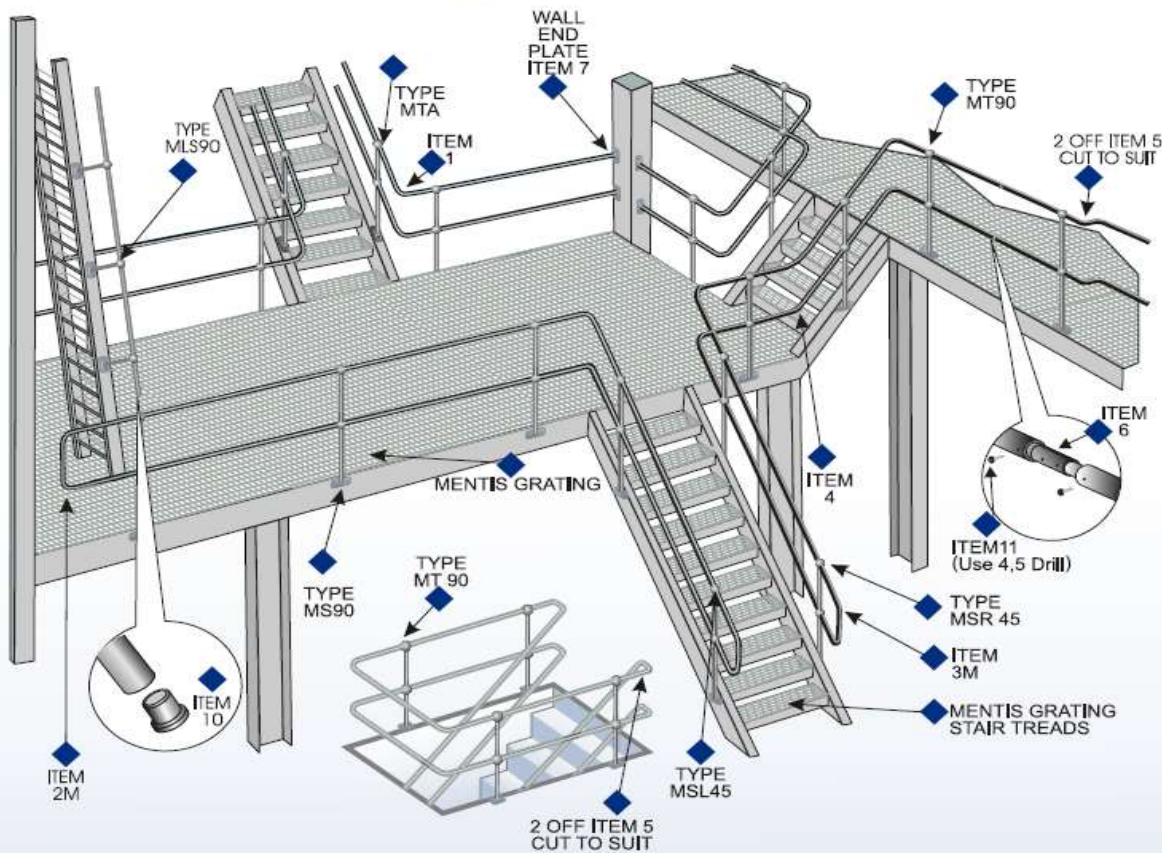


MOSSEL BAY
 16 Bolton Road, Voorbaai
 TEL: 044 695 0163
 EMAIL: sales@steelpipesmb.co.za




STEEL & PIPES for AFRICA
 YOUR ONE STOP STEEL TUBING and HARDWARE SHOP
 MOSSEL BAY

HAND RAILINGS

MILD STEEL BALL TYPE SHOWN

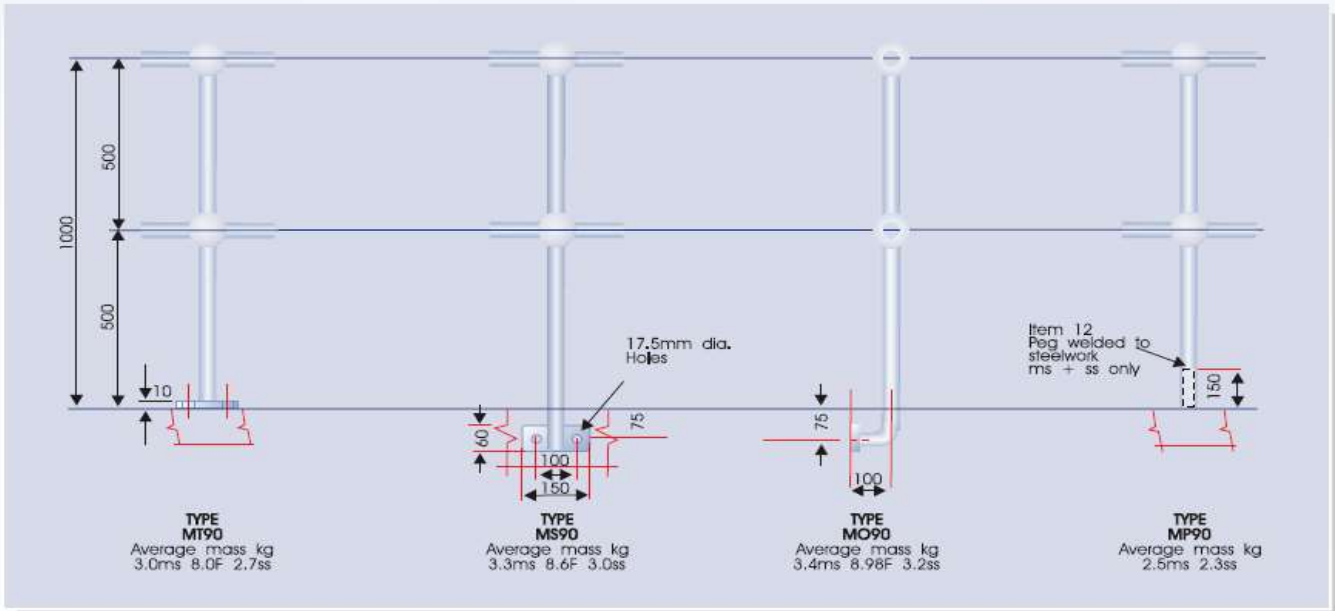

NOTES: FORGED SOLID AND STAINLESS STEEL ANGLE STANCHIONS AVAILABLE EX STOCK IN 40° AND 45° ONLY

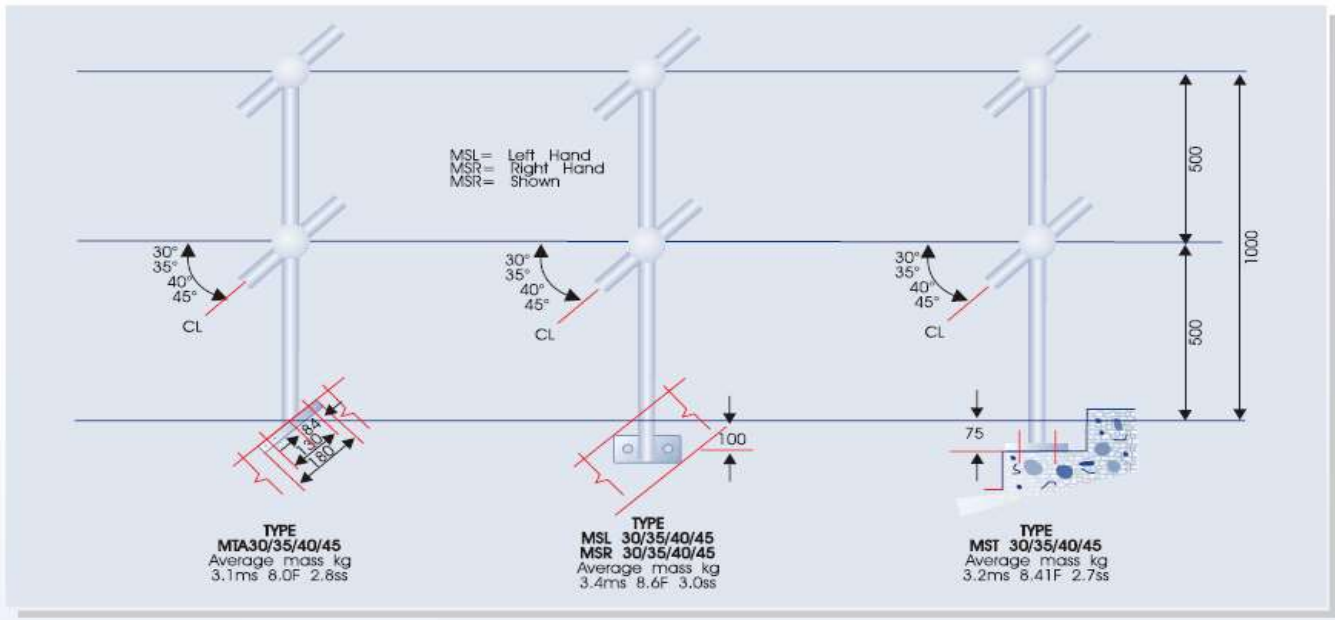


MOSSEL BAY
16 Bolton Road, Voorbaai
TEL: 044 695 0163
EMAIL: sales@steelpipesmb.co.za




STEEL & PIPES for AFRICA
YOUR ONE STOP STEEL, TUBING and HARDWARE SHOP
MOSSEL BAY

HAND RAILINGS

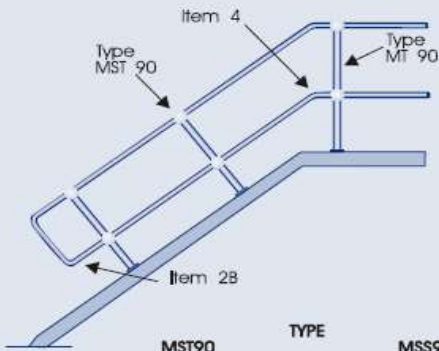


MST90 TYPE **MSS90**
 Stanchions fixed at 90° to stringers have been designed for use on staircases with angles greater than 45°

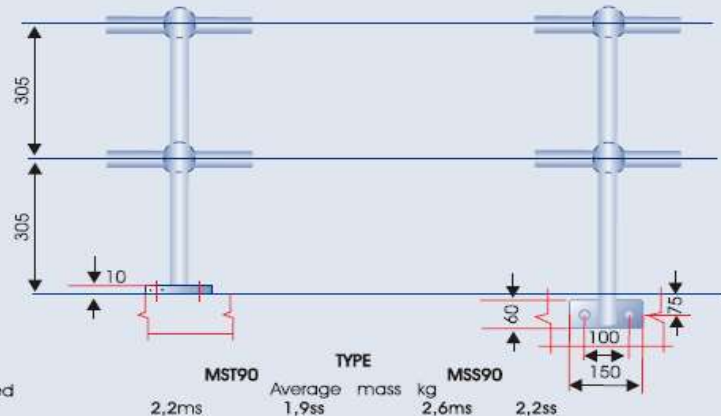


MST90 TYPE **MSS90**
 Average mass kg
 2,2ms 1,9ss 2,6ms 2,2ss

FOR USE ON LADDERS BETWEEN 70° AND 90° INCLINES

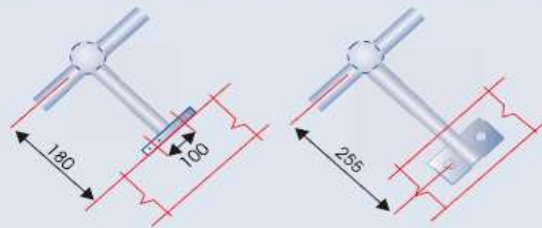

MLT90 TYPE **MLS90**
 Average mass kg
 1,1ms 1,0ss 1,4ms 1,3ss

ACCESSORIES

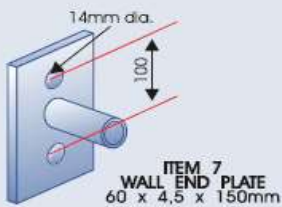

ITEM 7
 WALL END PLATE
 60 x 4,5 x 150mm



ITEM 10
 RUBBER END PLUG



ITEM 11
 HAMMER DRIVE SCREW
 No 12 electro brass
 (for ms only)




ITEM 12
 MILD STEEL - 35mm solid peg
 STAINLESS STEEL - 40mm O.D. Tube

MOSEL BAY
 16 Bolton Road, Voorbaai
 TEL: 044 695 0163
 EMAIL: sales@steelpipesmb.co.za




STEEL & PIPES for AFRICA
 YOUR ONE STOP STEEL, TUBING and HARDWARE SHOP
 MOSEL BAY


HAND RAILINGS



ITEM 1
90° LONG RADIUS CORNER BEND
 Average mass kg
 1,0ms 2,3F 0,7ss




ITEM 2B
90° STRAIGHT CLOSURE
 Average mass kg
 1,3ms 1,0ss




ITEM 2M
90° STRAIGHT CLOSURE
 Average mass kg
 1,7ms 3,8F 1,2ss

TOLERANCES:

- ◆ ON LENGTHS AND CENTRES 3mm
- ◆ ON WALL THICKNESS OF STANCHIONS 0,15mm
- ◆ ON ANGLES OF STANCHIONS AND BENDS 2°

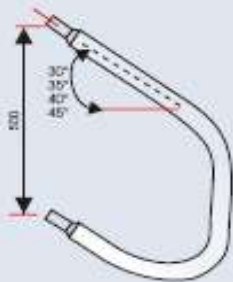


ITEM 3
3M 45° ANGLE CLOSURE
3AM 40° ANGLE CLOSURE
3BM 35° ANGLE CLOSURE (ms only)
3CM 30° ANGLE CLOSURE (ms only)
 Average mass kg
 1,8ms 3,8F 1,5ss

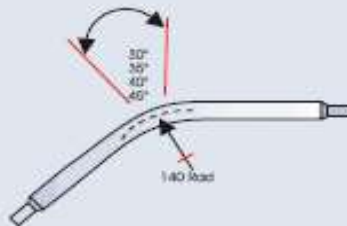

ITEM 4
4 45° STAIRWAY BEND
4A 40° STAIRWAY BEND
4B 35° STAIRWAY BEND (ms only)
4C 30° STAIRWAY BEND (ms only)
 Average mass kg
 1,1ms 2,3F 0,9ss



ITEM 5
90° SHORT RADIUS BEND
 Average mass kg
 0,9ms 1,9F 0,6ss



ITEM 6
SLIPJOINT
 Average mass kg
 0,2ms 0,2ss

Definitions
 ms Mild Steel
 ss Stainless Steel
 F Forged (Solid)

MOSSEL BAY
 16 Bolton Road, Voorbaai
 TEL: 044 695 0163
 EMAIL: sales@steelpipesmb.co.za



STEEL & PIPES 
 YOUR ONE STOP STEEL, TUBING and HARDWARE SHOP
 MOSSEL BAY